

CRYSTAL RESONATORS

SMD TYPE

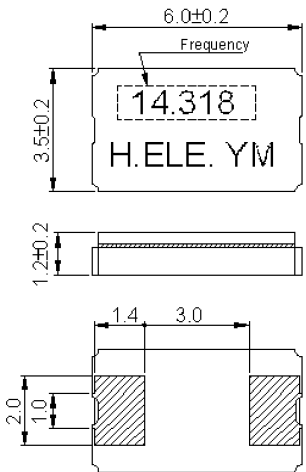


(RoHS Compliance) HSX630G Series



Features:

- A small and thin package with superior heat-resistant glass sealing. The product is suitable for reflow-soldering during production.
- High precision and reliability with excellent heat resistance.

Dimension (mm):

	Internal Connections <Top View>  Recommended Land Pattern (mm) <Top View> 
--	--

Standard Specification:

ITEM	TYPE	HSX630G			
	Frequency Range	7.372~10MHz	10~12MHz	12~50MHz	40 ~ 80 MHz
Mode	Fundamental				3rd Overtone
Load Capacitance	Series, 8pF, 10pF, 12pF or Specify				
Drive Level	10μW (100μW Max.)	10μW (300μW Max.)		10μW (500μW Max.)	
Frequency Tolerance	±30ppm , ±50ppm , ±100ppm (at. to 25℃)				
Equivalent Series Resistance	150Ω Max.	80Ω Max.	50Ω Max.	70Ω Max.	
Frequency Stability (Temp.)	±30ppm, ±50ppm, ±100ppm (Ref. to 25℃)				
Operating Temp. Range	-10 ~ +60℃				
Storage Temp. Range	-40 ~ +85℃				

*Packing Unit : 1,000pcs/Reel.

SHENZHEN KANGBI TECHNOLOGY INDUSTRY CO.,LTD

+86-0755-27876201 13728742863 E-mail:kangbidz@163.com

